



MEET
THE NEW
CREATIVITY

800X1600MM

Corporate Office :

Wingress Ceramica

Survey No.144/1P 10/P1, Plot no.4-6

2nd Floor, Office no.22, Akshar Business Center

At & Post – Jambudia, Morbi - 363642, Gujarat (India)

Email : wingressceramica@gmail.com

Customer Care No. : +91 9727770453, +91 9913222351

800X
1600MM

MATT



SIGNIFICANT

Enlighten your space with the most significant
style of our collection.

MARBLE TOUCH
next level slab



BERLINGTON GREY COL

RANDOM

 **WINGRESS**
luxury like heaven
CERAMICA

800X
1600MM | **MATT**

MARBLE TOUCH
next level slab

> **Prestige**
Banquet Halls



BERLINGTON NERO COL

RANDOM

 luxury like heaven
WINGRESS
CERAMICA

800X
1600MM | **MATT**

MARBLE TOUCH
next level slab



BERLINGTON SILVER COL

RANDOM

WINGRESS
luxury like heaven
CERAMICA

800X
1600MM | **MATT**

MARBLE TOUCH
next level slab

> **Prestige**
Banquet Halls



BERLINGTON SMOKE COL

RANDOM

WINGRESS
luxury like heaven
CERAMICA

800X
1600MM | **MATT**

MARBLE TOUCH
next level slab



MAGNIFICA BEIGE


RANDOM

WINGRESS
luxury like heaven
CERAMICA

800X
1600MM | **MATT**

MARBLE TOUCH
next level slab

> **Prestige**
Banquet Halls

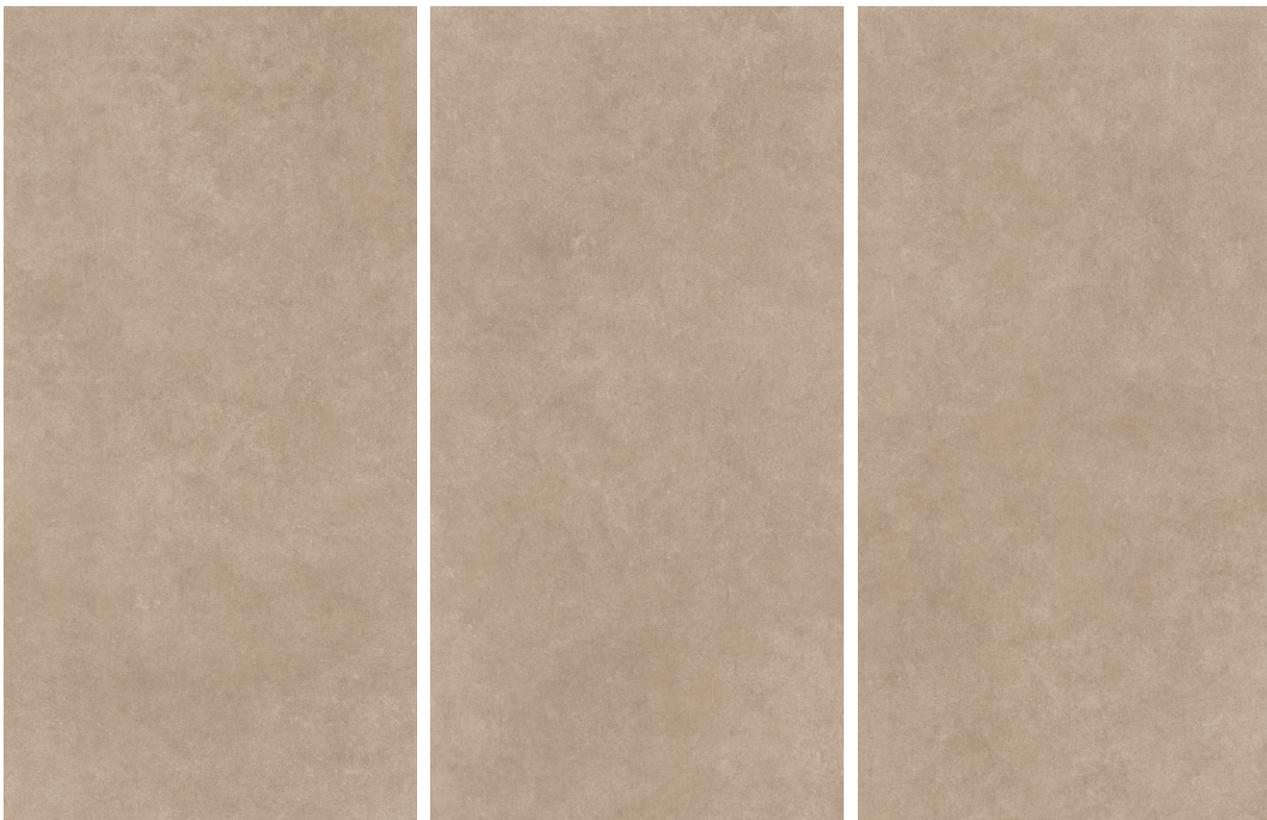


MAGNIFICA BROWN

RANDOM

WINGRESS
luxury like heaven
CERAMICA

800X
1600MM | **MATT**

MARBLE TOUCH
next level slab

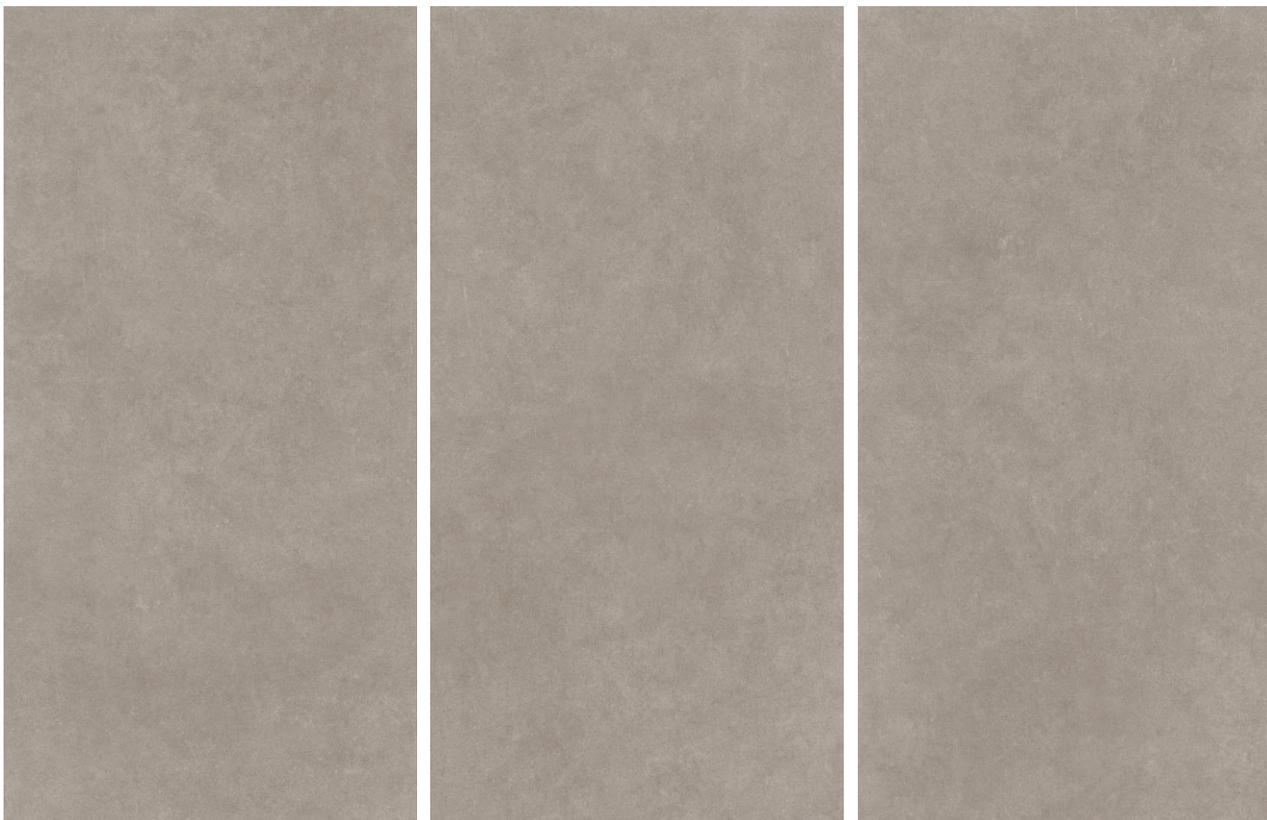

MAGNIFICA GRIS


RANDOM

WINGRESS
luxury like heaven
CERAMICA

800X
1600MM | **MATT**

MARBLE TOUCH
next level slab

> **Prestige**
Banquet Halls

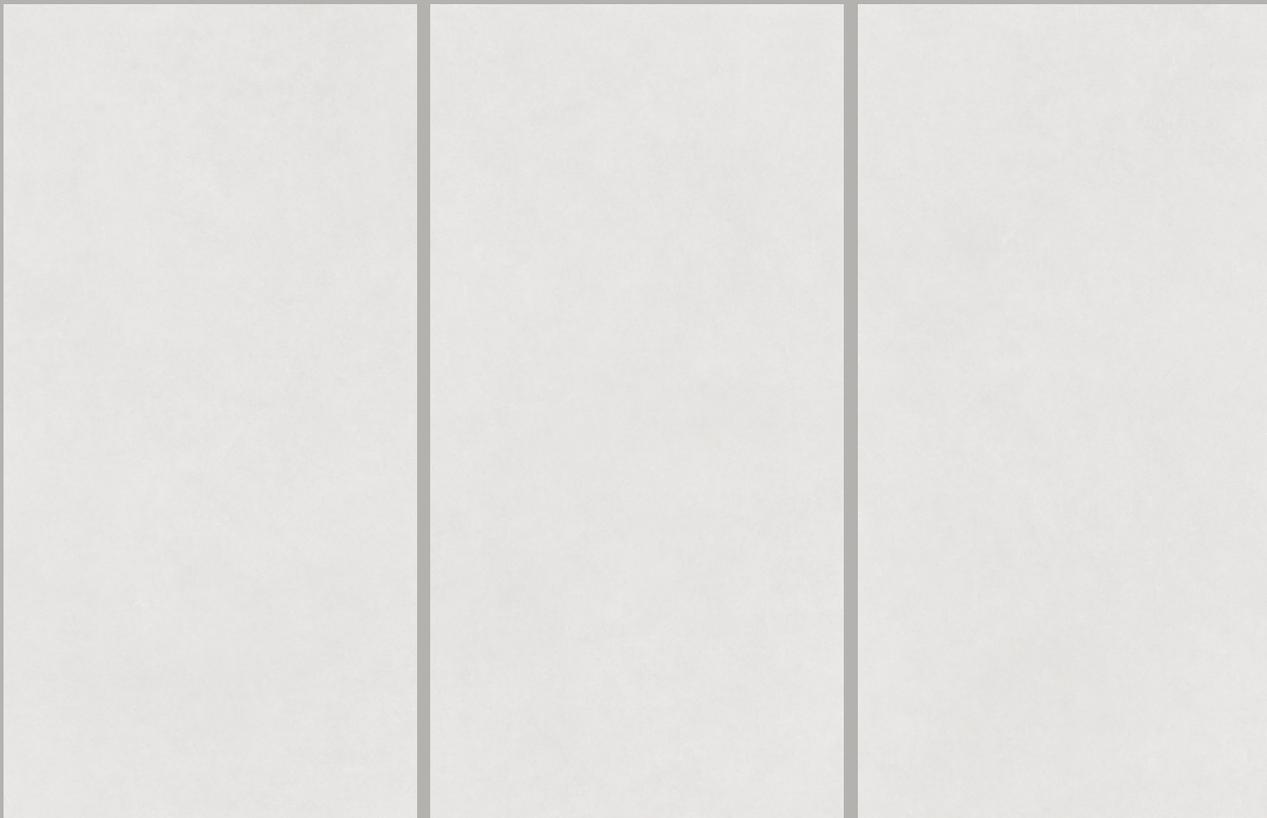

MAGNIFICA SILVER

RANDOM

WINGRESS
luxury like heaven
CERAMICA

800X
1600MM | **MATT**

TECHNICAL SPECIFICATION

CHARACTERISTIC	STANDARD AS PER ISO-13006/EN14411 GROUP Bla		VALUE	TEST METHOD
REGULATORY PROPERTIES				
Deviation in length & width	±0.5 %		±0.1 %	ISO-10545-2
Deviation in thickness	±5.0 %		±4.0 %	ISO-10545-2
Straightness in side	±0.5 %		±0.1 %	ISO-10545-2
Rectangularity	±0.5 %		±0.1 %	ISO-10545-2
Surface flatness	±0.5 %		±0.2 %	ISO-10545-2
Color difference	Unaltered		No change	ISO-10545-16
Glossiness	As per mfg		Min 90%	GLOSSOMETER
STRUCTURAL PROPERTIES				
Water absorption	< 0.50 %		< 0.05 %	ISO-10545-3
Apparent density	> 2.0 g/cc		> 2.10 g/cc	DIN 51082
MASSIVE MECHANICAL PROPERTIES				
Modulus of rupture	Min. 35 N/mm ²		Min. 40 N/mm ²	ISO-10545-4
Breaking strength	Min. 1300 N		Min. 2000 N	ISO-10545-4
Impact resistance	As per mfg.		Min. 0.55	ISO-10545-5
SURFACE MECHANICAL PROPERTIES				
Surface abrasion resistance	As per mfg		Min. Class-3	ISO-10545-7
MOH's hardness	As per mfg		Min. 4	EN 101
THERMO HYGROMETRIC PROPERTIES				
Frost resistance	No damage		No damage	ISO-10545-12
Thermal shock resistance	No damage		No damage	ISO-10545-9
Moisture expansion	Nil		Nil	ISO-10545-10
Thermal expansion (COE)	Max. 9.0 x 10 ⁻⁶		Max. 6.5 x 10 ⁻⁶	ISO-10545-8
Crazing resistance	As per mfg		Min. 10 Cycle	ISO-10545-11
CHEMICAL PROPERTIES				
Chemical resistance	No damage		No damage	ISO-10545-13
Stain resistance	Resistant		Resistant	SO-10545-14
SAFETY PROPERTIES				
Slip resistance	As per mfg		> 0.40	ISO-10545-17
Fire resistance	As per mfg		Fireproof	N. A.
Lead & Cadmium given off by glazed tiles	As per mfg		Does not yield Pb & Cd	ISO-10545-15

PACKING DETAILS

Size	Tiles / Box	Coverage Area / Box (approx.)	Coverage Area / Box (approx.)
80X160CM	2 pcs	2.56 Sq. m.	27.55 Sq. ft.

Note: Colour Shown are as accurate as the limitations of the printing process will allow. Prospective customers are advised to inspect a sample of the tile before ordering. Every effort has been made to ensure the accuracy of the information given. However, the company reserve the right to change the specifications without prior notice. Sometime variations in shade or size being inherent to ceramic industry may occur. Before fixing, we advise you to follow the fixing instructions on the cartons of the tiles as no responsibility can be accepted by the company once the tiles have been fixed.